



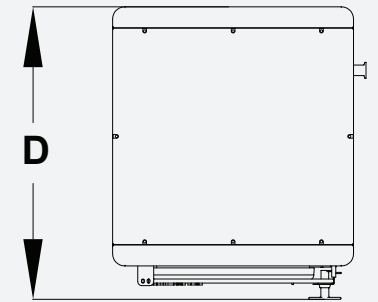

FD5  
FD5  
FD5

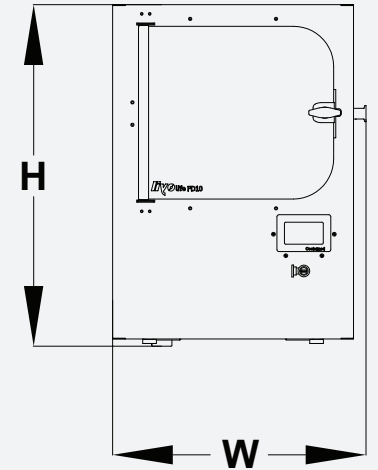

# FDS5

Ice Capacity (kg/lot)	5 kg	Number of Product Trays	5	Compressor	Embraco
Wet Product Loading (kg/lot)	3,5 / 4	Tray Dimensions (mm)	480*227	Vacuum Pump	Baosi
Machine Dimensions (w*d*h)(mm) (**)	631*728*850	Tray Depth (mm)	0,5	Blower	None
Machine Settlement Area (m <sup>2</sup> ) (**)	0,5	Total Tray Area m <sup>2</sup>	20	Remote Tracking System	None
Machine Platform Area (m <sup>2</sup> ) (*)	-	Number of Product Loading Cars	None	Chamber	AISI 304
Ice Condenser Temperature (°C)	-45	Rail System	No	Tray Material	AISI 304
Heat Conduction	Convection	IQF (Individual Quick Freezing)	None	Material of Heating Racks	Aluminum
Rack Temperature (°C)	max 70	Refrigerant	R410A		
Product Cooling Place	Within itself or in -40 chamber	Cooling Method	Gas		(*) As a recommendation, the recommended area may vary depending on the number of machines and layout.
Product Cooling Temperature (°C)	-32	Final Vacuum Level (Pa)	30 ≤		(**) Represents only the seating area of the machine. The cover sweeping area and the spaces between the machine and other devices are not included.
Number of Racks	5	Defrost System	Automatic		
Rack Dimensions (mm)	235*540	Power Consumption (kWh)	0,9		
Rack Clearance (mm)	44	Circle Dimension (m)	0,38		
Liquid Used in Heating Racks	Electrical Heater	Software	unique electronic card		

